



Distributeur agréé FLIR :

IRTECH

58 rue de l'Espérance

68120 PFASTATT

+33 (0)3 89 52 45 16

www.irtech-environnement.fr

irtech@orange.fr

FLIR P Series

FLIR P660

The High Performance infrared inspection system

FLIR P660 is the highest performing infrared inspection system available. With its state of the art technology, including 640x480 detector resolution and unique ergonomic design it is the natural choice for professional thermographers that want the most efficient instrument producing professional results. There are three standard set available for option:




1. The camera is equipped with standard 24° lens.
2. The camera is equipped with a 12° telephoto lens with 2x higher magnification
3. The camera is equipped with a 45° wide angle lens particularly useful when studying large areas at close distance.


- Image resolution 640x480
- Sensitivity 30 mK
- Large high resolution 5.6" flip-out LCD
- Tilttable high resolution viewfinder
- High performance lenses with USM technology
- 1-8 times continuous zoom with pan
- Contrast optimization
- Rotatable handle for convenient operation
- Built-in 3.2 Mpixel digital camera with target illuminator
- Standard temperature range -40 °C to 500 °C
- 1%, 1°C accuracy
- Real time radiometric storage to built-in RAM
- Periodic storage
- Panorama
- Voice and text annotation
- Built-in GPS
- MPEG-4 streaming to PC using USB or FireWire
- Programmable buttons

FLIR Systems FLIR P660 is an affordable easy-to-operate high-performance infrared camera that delivers accurate temperature measurements at productive and safe distances. This makes the P660 camera an ideal solution for cost-effective and efficient predictive maintenance programs.


The P660 includes an integrated 3.2 megapixel camera to aid in reporting. Infrared and visual images taken with the P660 can be stored in standard JPEG formats. The P660 visual camera includes matching Field Of View lenses, so IR and visual images are shown at similar long distances using the same Field Of View.

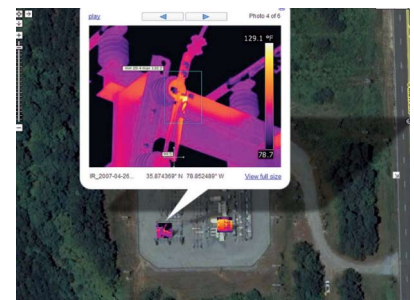

GPS technology helps to record location information

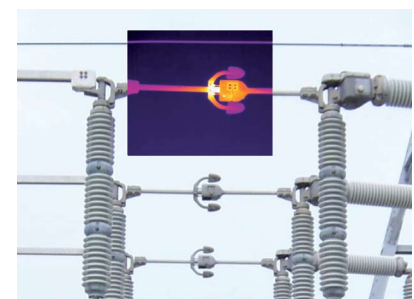

Fusion, a function that lets you display a part of digital photo as an infrared image.

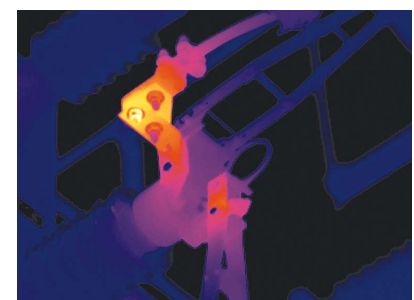

Infrared inspection helps to detect overheating parts, can avoid costly downtime and maintain plant efficiencies.


FLIR P660 Technical Specifications

Imaging and optical data	
Field of view (FOV) / Minimum focus distance	12° × 9° / 1.2 m
Spatial resolution (IFOV)	0.33 mrad
Thermal sensitivity / NETD	30 mK @ +30°C
Image frequency	30 Hz
Focus	Automatic or manual (electric or on the lens)
Zoom	1–8× continuous, digital zoom, including panning
Focal Plane Array (FPA) / Spectral range	Uncooled microbolometer / 7.5–13 μm
IR resolution	640 × 480 pixels
Image presentation	
Display	Built-in widescreen, 5.6 in. LCD, 1024 × 600 pixels
Viewfinder	Built-in, tiltable LCD, 800 × 600 pixels
Automatic image adjustment	Continuous / manual; linear or histogram based
Manual image adjustment	Level/span / max / min
Contrast optimization	Automatic, adjustable DDE
Image modes	IR-image, visual image, thumbnail gallery
Reference image	Shown together with live IR image
Measurement	
Temperature range	–40°C to +500°C
Accuracy	±1°C or ±1% of reading for limited temperature range, ±2°C or ±2% of reading
Measurement analysis	
Spotmeter	10
Area	5 boxes or circles with max. / min. / average
Automatic hot / cold detection	Max / Min temp. value and position shown within box, circle or on a line
Isotherm	2 with above / below / interval
Profile	1 live line (horizontal or vertical)
Difference temperature	Delta temperature between measurement functions or reference temperature
Reference temperature	Manually set or captured from any measurement function
Emissivity correction	Variable from 0.01 to 1.0 or selected from editable materials list
Measurement corrections	Reflected temperature, optics transmission, atmospheric transmission and external optics
Measurement function alarm	Audible/visual alarms (above / below) on any selected measurement function
Set-up	
Set-up commands	Configurable measurement tools menu; configure information to be shown in image; 2 Programmable buttons; user profiles; local adaptation of units, language, date and time formats
Storage of images	
Image storage	Standard JPEG, including measurement data, on memory card Built-in RAM for burst recording
Image storage mode	IR / visual images; simultaneous storage of IR and visual images Visual image is automatically associated with corresponding IR image
Periodic image storage	Every 10 seconds up to 24 hours
Panorama	For creating panorama images in FLIR Reporter Building software
Image annotations	
Voice	60 seconds stored with the image
Text	Predefined text or free text from PDA (via IrDA) stored with the image
Image marker	4 on IR or visual image
GPS	Location data automatically added to every image from built-in GPS
Video recording and streaming	
Radiometric IR-video recording	Real-time to built-in RAM, transferable to memory card.
Non-radiometric IR-video recording	MPEG-4 to memory card
Non-radiometric IR-video streaming	MPEG-4 to PC using USB or WLAN (optional)
Digital camera	
Built-in digital camera	3.2 Mpixel, auto focus, and video lamp
Laser pointer	
Laser	Activated by dedicated button
Data communication interfaces	
Interfaces	USB-mini, USB-A, IrDA, composite video, headset connection
Power system	
Battery	Li Ion, 3 hours operating time
Charging system	In camera (AC adapter or 12 V from a vehicle) or 2-bay charger
Power management	Automatic shutdown and sleep mode (user selectable)
Environmental data	
Operating temperature range	–15°C to +50°C
Storage temperature range	–40°C to +70°C
Humidity (operating and storage)	IEC 68-2-30/24 h 95% relative humidity +25°C to +40°C
Encapsulation	IP 54 (IEC 60529)
Bump	25 g (IEC 60068-2-29)
Vibration	2 g (IEC 60068-2-6)
Physical data	
Camera weight, incl. lens and battery	2.18 kg
Cameras size, incl. lens (L × W × H)	355 × 144 × 147 mm
Tripod mounting	UNC ¼"-20

Camera includes:
Hard transport case
Infrared camera with lens
Battery (2 ea., one inserted in camera, one outside camera)
Battery charger
Calibration certificate
FLIR QuickReport™ PC software CD-ROM
FireWire cable, 4/6
FireWire cable, 6/6
Headset
Lens cap (mounted on lens)
Lens cap (2 ea.)
Mains cable
Memory card-to-USB adapter
Memory card with adapter
Power supply
Printed Getting Started Guide
Shoulder strap
USB cable
User documentation CD-ROM
Video cable
Warranty extension card or Registration card
Supplies & Accessories
Close-up IR lens 0.5X, f = 75 mm (fits 24° IR lens) for ThermoCAM and FLIR 600 series
IR lens f = 76 mm, 12°, incl. case for FLIR 600 series
IR lens, f = 131 mm, 7°, incl. case for FLIR 600 series
IR lens f = 19 mm, 45°, incl. case for FLIR 600 series
IR lens f = 38 mm, 24°, incl. case for FLIR 600 series
Macro lens 1x (25 um) with case
High temperature option +2000°C
High temperature option +1500°C
Battery
Battery charger, incl. power supply and cable
Battery charger, incl. power supply and cable
Battery charger, incl. power supply and cable
Battery charger, incl. power supply with multi plugs
Power supply, incl. multi plugs
SD memory card, 1 GB
Adapter, SD memory card to USB
Memory card micro-SD with adapters
USB cable Std A <-> Mini-B, 2 m
FireWire cable 6/6, 2.0 m
FireWire cable 4/6, 2.0 m
Video cable, RCA <-> RCA, 2.0 m
Cigarette lighter adapter kit, 12 VDC, 1.2 m
Hard transport case for FLIR B/P/SC640
Headset, 3.5 mm plug
Remote Control Unit
FLIR Reporter Ver. 8.3 Professional (Sec. device)
FLIR Reporter Ver. 8.3 Professional
FLIR Reporter Ver. 8.3 Standard (Sec. device)
FLIR Reporter Ver. 8.3 Standard
FLIR BuildIR
FLIR Reporter Ver. 8.5 Standard
FLIR Reporter Ver. 8.5 Professional
Cover Visual Camera mkII



FLIR Reporter software - powerful yet easy-to-use tool to generate comprehensive and professional infrared inspection reports.



Asia Pacific Headquarter
 Hong Kong
 FLIR Systems Co Ltd.
 Room 1613 – 16, Tower 2 Grand Central Plaza
 138 Shatin Rural Committee Road, N.T, Hong Kong
 Tel: +852 2792 8955 Fax: +852 2792 8952
 Email: flir@flir.com.hk Web: www.flir.com/thg

